

Pattress boxes 1001 - 1002 - 1003

The original ...
... since 1966 - with improved geometry



372 501 857 - 1001



372 501 847 - 1002



372 201 747 - 1003

The tried and tested pattress box

Their robust design makes the boxes ideal for concrete construction.

Pipe feedthroughs

The boxes feature several M20 and zT M25 pipe feedthroughs on each side.

The caps can be easily removed using light pressure or with a tool.

Pegs on the side walls prevent the feedthroughs from being pressed against the opposite side. The pipe feedthroughs have a small groove that fastens to the corrugated tube.

Glow wire testing

All boxes meet the glow wire test (GWT) up to 850°C according to EN 60670.

They are thus suitable for concrete, masonry as well as wooden and hollow walls.



The white boxes are tested up to 650°C and are therefore ideal for installation in non-combustible walls.

Colour, material

White, HDPE (halogen-free).

Dark grey, HDPE (halogen free), flame retardant

Item No.	Ammer No.	Units	Description	Dimensions (mm, LxWxD)	Feedthroughs	Size
372 501 857	1001	80	Pattress box single, GWT 650°C	60 x 55	8x ø20	1 x 1
372 501 847	1002	80	Pattress box single, GWT 650°C	60 x 55	8x ø20	1 x 1
372 201 747	1003	100	Pattress box single, GWT 850°C	70 x 70 x 55	8x ø20 / 2x ø25	1 x 1

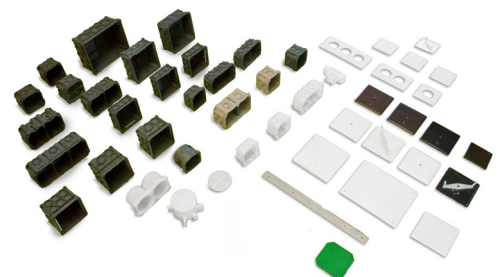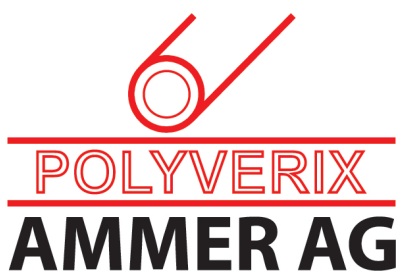

Glattalstrasse 525 · CH-8153 Rümlang · Tel +41 44 817 24 10 · info@ammer.ch · www.polyverix.ch

Ammer AG is a member of the POLYVERIX Group www.polyverix.ch