

Pattress boxes 1061 - 1063 - 1068

The original ...

... since 1966 - with improved geometry for installation in combustible walls and cavity walls



155 012 047 - 1061



155 013 047 - 1063



155 000 047 - 1068

The tried and tested junction box for every type of wall

Their robust design makes the boxes ideal for concrete construction.

Thanks to their large installation depth, the large volume and the high number of pipe feedthroughs, they leave plenty of room for installations.

Pipe feedthroughs

The boxes come with several M16, M20, M25, M32 and M40 pipe feedthroughs on each side.

The pipe feedthroughs have a small groove that fastens to the corrugated tube.

Affixing cover plates

A chuck for mounting the supplied threaded rod, which enables the mounting of all standard cover plates, is located at the bottom of the box.

Glow wire testing


All boxes meet the glow wire test (GWT) up to 850°C according to EN 60670.

They are thus suitable for concrete, masonry as well as wooden and hollow walls.

Colour, material

Dark grey, HDPE (halogen free), flame retardant.

Item No.	Ammer No.	Units	Description	Dimensions (mm, LxWxD)	Feedthroughs
155 012 047	1061	16	Junction box, GWT 850°C	170 x 130 x 70	22x ø20 / 14x ø25 / 10x ø32 / 10x ø40
155 013 047	1063	32	Junction box, GWT 850°C	110 x 110 x 55	1x ø16 / 17x ø20 / 10x ø25 / 4x ø40
155 000 047	1068	30	Junction box, GWT 850°C	122 x 122 x 55	20x ø20 / 16x ø25 / 4x ø32

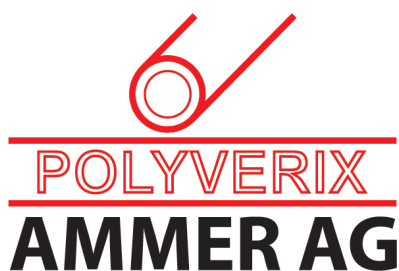

Glattalstrasse 525 · CH-8153 Rümlang · Tel +41 44 817 24 10 · info@ammer.ch · www.ammer.ch

Ammer AG is a member of the POLYVERIX Group www.polyverix.ch